

- 1. PAVERS SHOWN ABOVE SHALL BE 2 ½"THICK; ALL SIZES ARE NOMINAL
- 2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
- 3. PAVERS CAN BE MORTAR SET OR SAND SET
- 4. SANDBLAST FINISH LIGHT, MEDIUM OR HEAVY
- 5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
- 6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES
- 7. PAVERS ARE MANUFACTURED WITH SPACING TABS TO PROVIDE UNIFORM JOINT SPACING




#### **DIAMOND PAVER - GENERAL DETAILS**


**SCALE: N.T.S.** 

PAGE 22





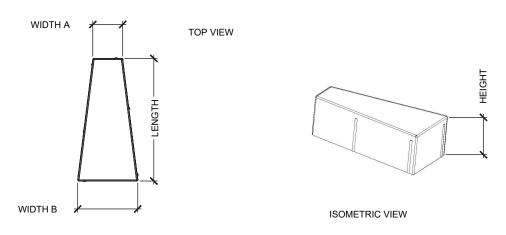



WIDTH A	WIDTH B	<u>LENGTH</u>	<u>HEIGHT</u>	TAB HEIGHT
27/8"	5 <sup>7</sup> / <sub>8</sub> "	11 5/16"	2 ½"	$1^{7}/_{8}''$
3 7/8"	7 7/8"	11 5/16"	2 ½"	$1^{7}/_{8}''$
5 <sup>7</sup> / <sub>8</sub> "	11 <sup>7</sup> / <sub>8</sub> "	11 5/16"	2 ½"	17/8"

- 1. PAVERS SHOWN ABOVE SHALL BE 2 ½"THICK; ALL SIZES ARE NOMINAL
- 2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
- 3. PAVERS CAN BE MORTAR SET OR SAND SET
- 4. SANDBLAST FINISH LIGHT, MEDIUM OR HEAVY
- 5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
- 6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES
- 7. PAVERS ARE MANUFACTURED WITH SPACING TABS TO PROVIDE UNIFORM JOINT SPACING




## DIAMOND POINT HALF PAVER - GENERAL DETAILS

SCALE: N.T.S.

PAGE 23



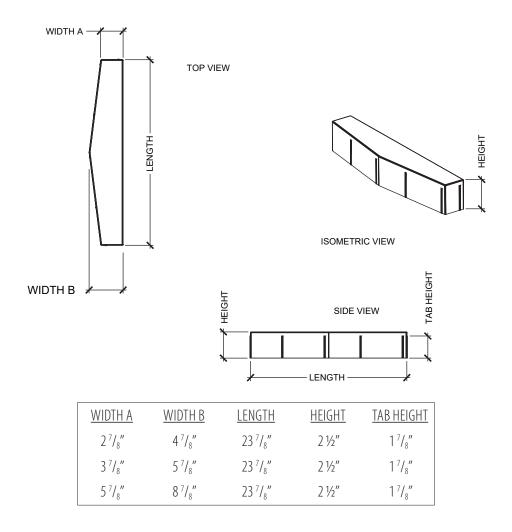

- 1. PAVERS SHOWN ABOVE SHALL BE 2 ½"THICK; ALL SIZES ARE NOMINAL
- 2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
- 3. PAVERS CAN BE MORTAR SET OR SAND SET
- 4. SANDBLAST FINISH LIGHT, MEDIUM OR HEAVY
- 5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
- 6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES
- 7. PAVERS ARE MANUFACTURED WITH SPACING TABS TO PROVIDE UNIFORM JOINT SPACING




## DIAMOND FLAT HALF PAVER - GENERAL DETAILS

**SCALE: N.T.S.** 

PAGE 24



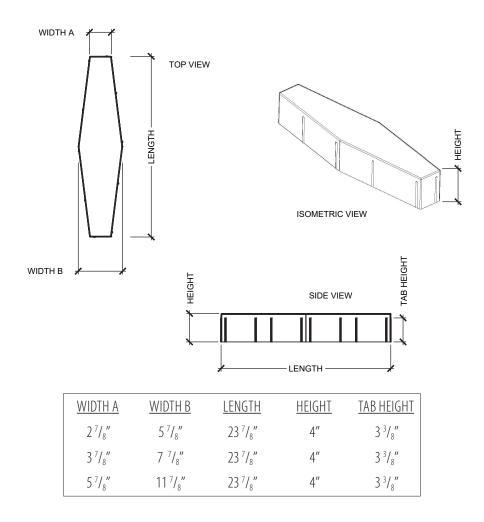


- 1. PAVERS SHOWN ABOVE SHALL BE 4"THICK; ALL SIZES ARE NOMINAL
- 2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
- 3. PAVERS CAN BE MORTAR SET OR SAND SET
- 4. SANDBLAST FINISH LIGHT, MEDIUM OR HEAVY
- 5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
- 6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES
- 7. PAVERS ARE MANUFACTURED WITH SPACING TABS TO PROVIDE UNIFORM JOINT SPACING




PAGE 25





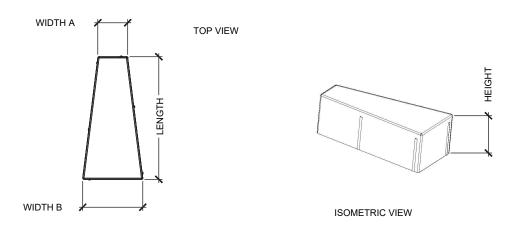



WIDTH A	WIDTH B	<u>LENGTH</u>	<u>HEIGHT</u>	TAB HEIGHT
27/8"	5 <sup>7</sup> / <sub>8</sub> "	$11^{15}/_{16}"$	4"	$3^{3}/_{8}''$
3 7/8"	7 7/8"	$11^{15}/_{16}"$	4"	$3^{3}/_{8}''$
5 <sup>7</sup> / <sub>8</sub> "	11 7/8"	11 15/1"	4"	3 3/8"

- 1. PAVERS SHOWN ABOVE SHALL BE 4"THICK; ALL SIZES ARE NOMINAL
- 2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
- 3. PAVERS CAN BE MORTAR SET OR SAND SET
- 4. SANDBLAST FINISH LIGHT, MEDIUM OR HEAVY
- 5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
- 6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES
- 7. PAVERS ARE MANUFACTURED WITH SPACING TABS TO PROVIDE UNIFORM JOINT SPACING




# DIAMOND POINT HALF PAVER - GENERAL DETAILS

SCALE: N.T.S.

PAGE 26



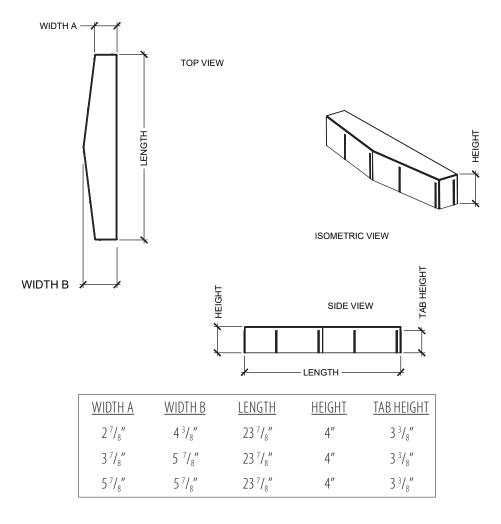

- 1. PAVERS SHOWN ABOVE SHALL BE 4"THICK; ALL SIZES ARE NOMINAL
- 2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
- 3. PAVERS CAN BE MORTAR SET OR SAND SET
- 4. SANDBLAST FINISH LIGHT, MEDIUM OR HEAVY
- 5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
- 6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES
- 7. PAVERS ARE MANUFACTURED WITH SPACING TABS TO PROVIDE UNIFORM JOINT SPACING



# DIAMOND FLAT HALF PAVER - GENERAL DETAILS

**SCALE: N.T.S.** 

PAGE 27