

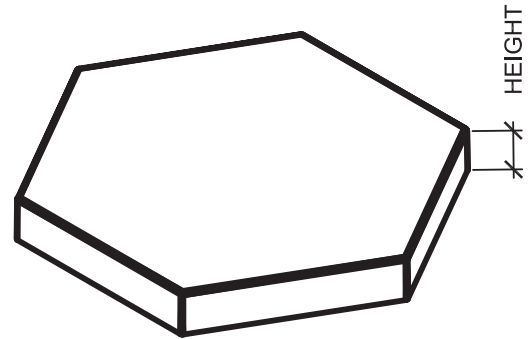


TOP VIEW

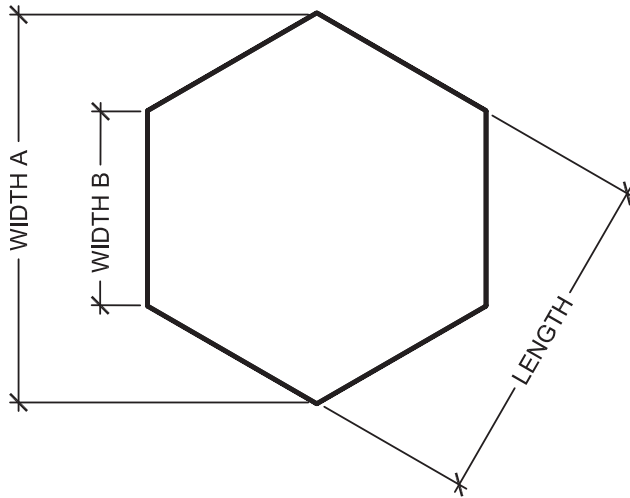


ISOMETRIC VIEW

SIDE VIEW

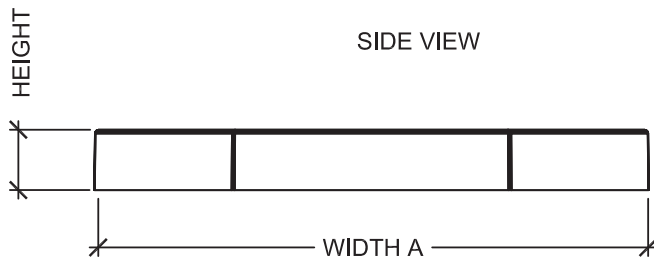




<u>WIDTH A</u>	<u>WIDTH B</u>	<u>LENGTH</u>	<u>HEIGHT</u>
18 1/4"	9 1/8"	16"	2"
24"	12"	20 1/2"	2 1/2"
27 1/2"	13 3/4"	24"	2 1/2"

1. PAVERS SHOWN ABOVE SHALL BE 2" OR 2 1/2" THICK; ALL SIZES ARE NOMINAL
2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
3. PAVERS CAN BE MORTAR SET OR SAND SET
4. SANDBLAST FINISH - LIGHT, MEDIUM OR HEAVY
5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES



HEXAGONAL PAVER - GENERAL DETAILS


SCALE: N.T.S.

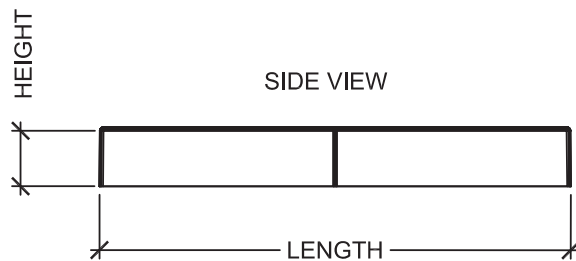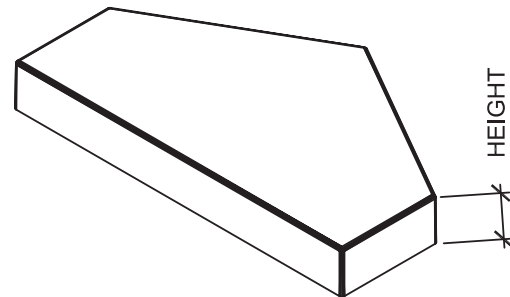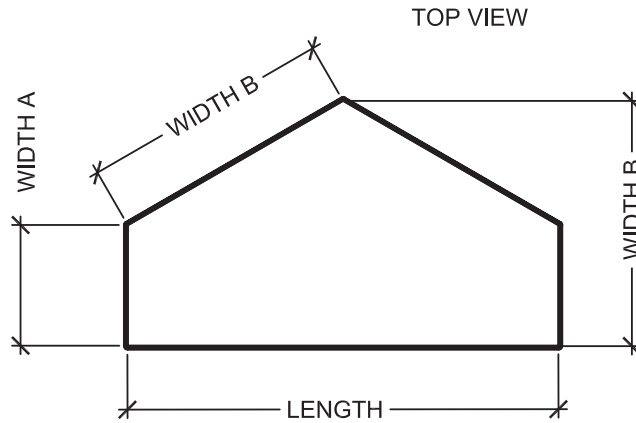

ISOMETRIC VIEW

<u>WIDTH A</u>	<u>WIDTH B</u>	<u>LENGTH</u>	<u>HEIGHT</u>
4 1/2"	9 1/8"	16"	2"
6"	12"	20 1/2"	2 1/2"
7"	13 3/4"	24"	2 1/2"


1. PAVERS SHOWN ABOVE SHALL BE 2" OR 2 1/2" THICK; ALL SIZES ARE NOMINAL
2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
3. PAVERS CAN BE MORTAR SET OR SAND SET
4. SANDBLAST FINISH - LIGHT, MEDIUM OR HEAVY
5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES




HEXAGONAL POINT HALF PAVER - GENERAL DETAILS

SCALE: N.T.S.

TOP VIEW

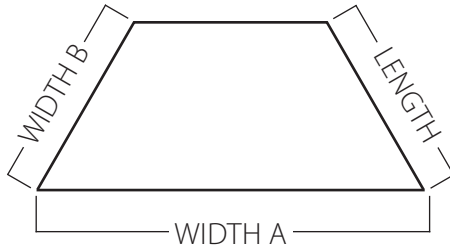


ISOMETRIC VIEW

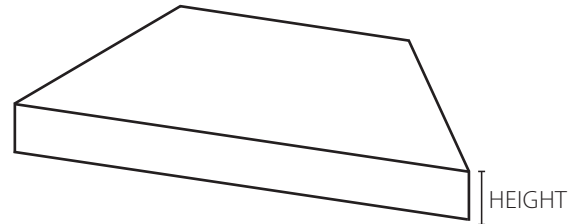

<u>WIDTH A</u>	<u>WIDTH B</u>	<u>LENGTH</u>	<u>HEIGHT</u>
18 ¼"	9 ⅛"	8"	2"
24"	12"	10 ¼"	2 ½"
27 ½"	13 ¾"	12"	2 ½"

1. PAVERS SHOWN ABOVE SHALL BE 2" OR 2 ½" THICK; ALL SIZES ARE NOMINAL
2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
3. PAVERS CAN BE MORTAR SET OR SAND SET
4. SANDBLAST FINISH - LIGHT, MEDIUM OR HEAVY
5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES



HEXAGONAL FLAT HALF PAVER - GENERAL DETAILS

SCALE: N.T.S.

PAGE 11