

- 1. PAVERS SHOWN ABOVE SHALL BE 4"THICK; ALL SIZES ARE NOMINAL
- 2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
- 3. PAVERS CAN BE MORTAR SET OR SAND SET
- 4. SANDBLAST FINISH LIGHT, MEDIUM OR HEAVY
- 5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
- 6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES



NARROW MODULAR PAVER FALSE JOINT - DETAILS


SCALE: N.T.S.


PAGE 16

800.572.9029 STEPSTONEPRECAST.COM











ISOMETRIC VIEW





- 1. PAVERS SHOWN ABOVE SHALL BE 4"THICK; ALL SIZES ARE NOMINAL
- 2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
- 3. PAVERS CAN BE MORTAR SET OR SAND SET
- 4. SANDBLAST FINISH LIGHT, MEDIUM OR HEAVY
- 5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
- 6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES



NARROW MODULAR PAVER 4" X 12" X 4" - DETAILS


SCALE: N.T.S.


PAGE 17


800.572.9029










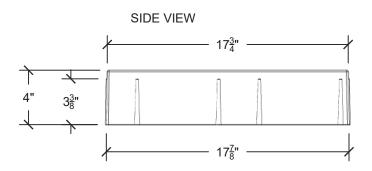



- 1. PAVERS SHOWN ABOVE SHALL BE 4"THICK; ALL SIZES ARE NOMINAL
- 2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
- 3. PAVERS CAN BE MORTAR SET OR SAND SET
- 4. SANDBLAST FINISH LIGHT, MEDIUM OR HEAVY
- 5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
- 6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES



NARROW MODULAR PAVER 4" X 18" X 4" - DETAILS

SCALE: N.T.S.


PAGE 18

800.572.9029







TOP VIEW 3" 1178" 6" 278" 5" 8"



ISOMETRIC VIEW





- 1. NARROW MODULAR PAVERS SHOWN ABOVE SHALL BE 2 ½"THICK AS MANUFACTURED BY STEPSTONE, LLC. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 P.S.I.
- 2. PAVERS MUST BE MORTAR SET
- 3. SANDBLAST FINISH LIGHT, MEDIUM OR HEAVY.
- 4. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
- 5. ALL DIMENSIONS ARE NOMINAL. ALL SIDES HAVE DRAFT. SEE SPECIFICATIONS FOR TOLERANCES.
- 6. TABS ARE LOCATED ALONG ALL EDGES TO PROVIDE UNIFORM JOINT SPACING.



NARROW MODULAR PAVER TILE 3" X 12"- DETAILS


SCALE: N.T.S.


PAGE 19

800.572.9029





CALARC® DIVISION





ISOMETRIC VIEW





- 1. PAVERS SHOWN ABOVE SHALL BE 1" OR 1 3/16" THICK; ALL SIZES ARE NOMINAL
- 2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
- 3. PAVERS MUST BE MORTAR SET
- 4. SANDBLAST FINISH LIGHT, MEDIUM OR HEAVY
- 5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
- 6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES



NARROW MODULAR PAVER TILE 3" X 18"- DETAILS

SCALE: N.T.S.

PAGE 20

800.572.9029