


CALARC® DIVISION

NATIONWIDE DISTRIBUTION



- 1. PAVERS SHOWN ABOVE SHALL BE 2", 2 ½" OR 4"THICK; ALL SIZES ARE NOMINAL
- 2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
- 3. PAVERS CAN BE SAND SET OR MORTAR SET
- 4. STIPPLED OR SANDBLAST FINISH LIGHT, MEDIUM OR HEAVY
- 5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS, FEDERAL YELLOW AND CHARCOAL; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
- 6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES
- 7. ORIENTATION OF DOMES ON CAST PAVERS IS +/- 1/16" OF SPECIFIED DIMENSIONS
- 8. ALL DIMENSIONS LISTED HERE ARE INTENDED TO MEET ADA SPECIFICATIONS
- 9. CONFIRM WITH LOCAL BUILDING CODES/OFFICIALS BEFORE INSTALLATION

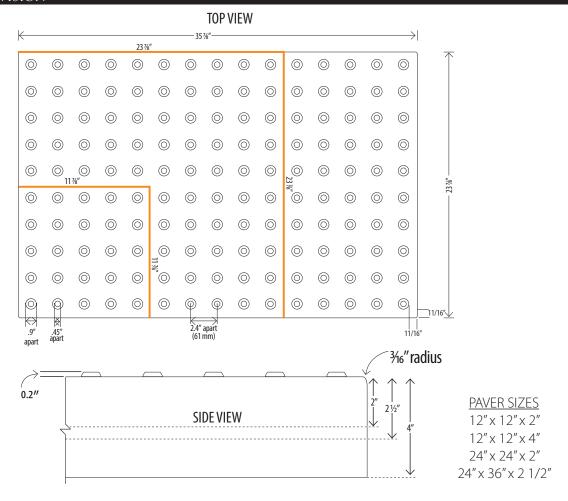

TRUNCATED DOME PAVER - GENERAL DETAILS

SCALE: N.T.S.

PAGE 30

800.572.9029 STEPSTONEPRECAST.COM