


CALARC® DIVISION



- 1. PAVERS SHOWN ABOVE SHALL BE 4"THICK; ALL SIZES ARE NOMINAL
- 2. PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 5,000 PSI
- 3. PAVERS CAN BE MORTAR SET OR SAND SET
- 4. SANDBLAST FINISH LIGHT, MEDIUM OR HEAVY
- 5. PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS; CUSTOM COLORS AND SIZES MAY BE AVAILABLE UPON REQUEST
- 6. ALL SIDES HAVE DRAFT; SEE SPECIFICATIONS FOR TOLERANCES

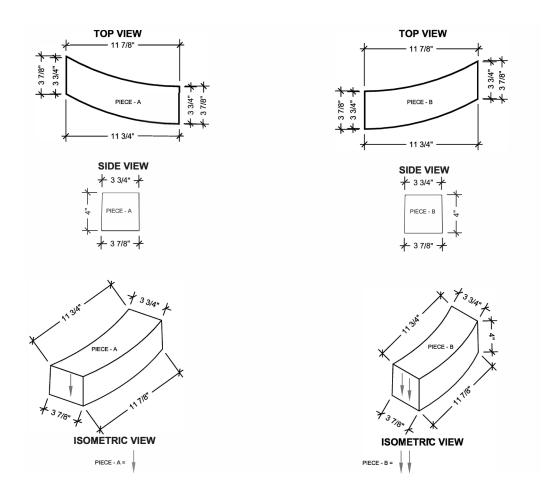

WAVE PAVER PIECES A & B- GENERAL DETAILS

SCALE: N.T.S.

PAGE 21

800.572.9029 STEPSTONEPRECAST.COM