


FILE: STP-5.0-08  
REV: 08.30.12

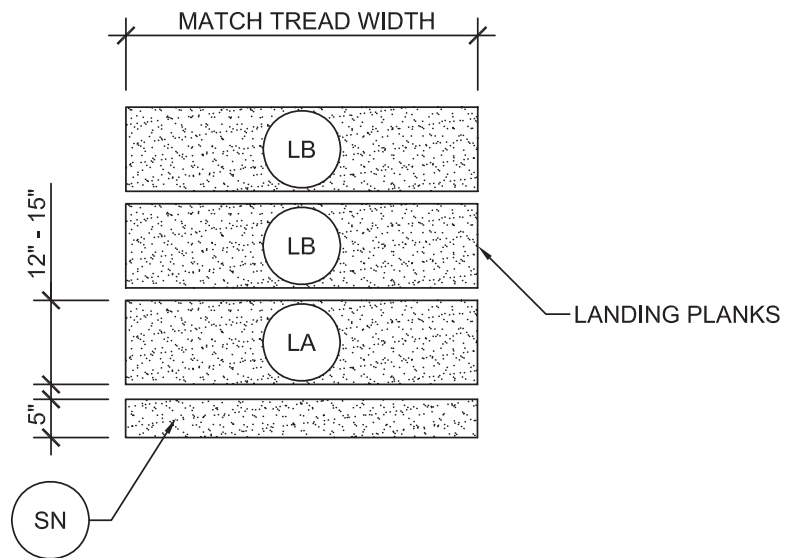

- LA LANDING PLANK "A"
- LB LANDING PLANK "B"
- T TREAD
- SN STARTER NOSING (FOR CLOSED RISERS ONLY)

- NOTES:**
1. ALLOW 1/8" TOLERANCE BETWEEN LANDING PLANKS.
  2. MAXIMUM SPAN IS 96" FOR LONG SPAN CLOSED RISER TREADS.
  3. MAXIMUM SPAN IS 60" FOR OPEN RISER TREADS AND LANDING PLANKS.

**STRAIGHT STAIR INTERMEDIATE/ TOP LANDING**

SCALE: N.T.S.
FILE: STP-5.0-08

PRECAST CONCRETE TREADS AND LANDINGS SHOWN ON PLANS SHALL BE FROM THE LONG SPAN "STEPTREAD" SYSTEM BY "STEPSTONE, INC." OF GARDENA, CA FOR STEEL CONSTRUCTION. THE MANUFACTURER IS TO SUPPLY ALL PRECAST CONCRETE "STEPTREAD" SYSTEM PARTS, FEATURING BOTTOM WELD PLATES FOR WELD-ON CONNECTIONS. ALL REINFORCING AND CONNECTION PLATES WILL BE ZINC PLATED. ONLY ITEMS NOTED AS BY "STEPSTONE, INC." WILL BE FURNISHED BY "STEPSTONE, INC." SUCH ITEMS ARE TO BE INSTALLED BY OTHERS.